


elements MIC 2(AC010)

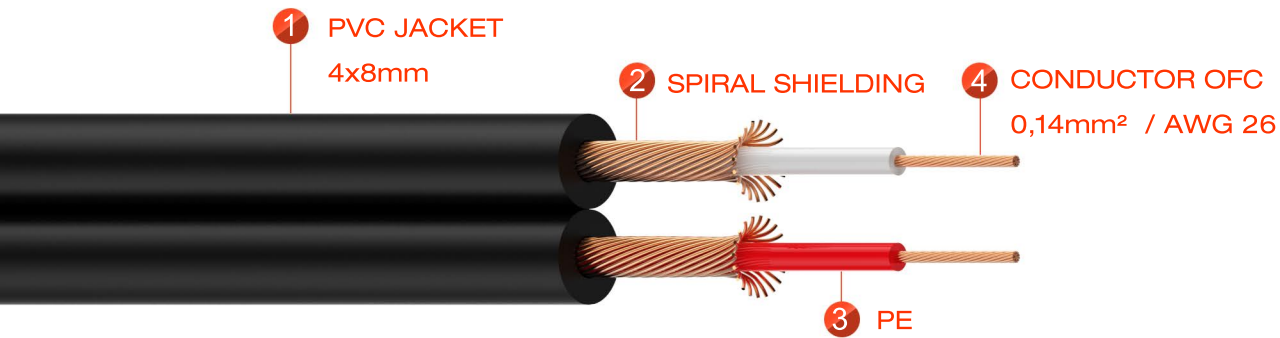

TECHNICAL DATA:

- | | |
|-------------------------------|-------------------------|
| • Jacket,diameter | PVC 4x8mm |
| • AWG | 26 |
| • No. of inner conductors | 2x1x0,14mm ² |
| • Copper strand per conductor | 18x0,10mm |
| • Conductor insulation | PE |
| • Shielding | copper spiral shielding |
| • Shielding factor | 90% |
| • Temperature range | min. -20°C |
| • Temperature range | max. +70°C |

ELECTRICAL DATA:

- | | |
|------------------------------|--------|
| • Capac. cond./cond.per 1 m | 250 pF |
| • Cond. resistance per 1 km | 125 Ω |
| • Insulation resist.per 1 km | >1 GΩ |